


# Pressure Sensor Interface (PSI)

Teledyne Test Services' **Pressure Sensor Interface (PSI)** offers the AOV tester a convenient package that consolidates six pressure transducers along with position and strain inputs for connection to the QUIKLOOK II AOV System.

## Features

- Six Calibrated Pressure Transducers
  - (2) 0 – 30 psig transducers
  - (4) 0 – 100 psig transducers
  - Other Ranges Available
- Strain Connection
- Position Connection
- Integral 15 ft Cable Set
- Accuracy 0.5 % of Full Scale
- Color Coded Cables and Transducers
- Easy Setup

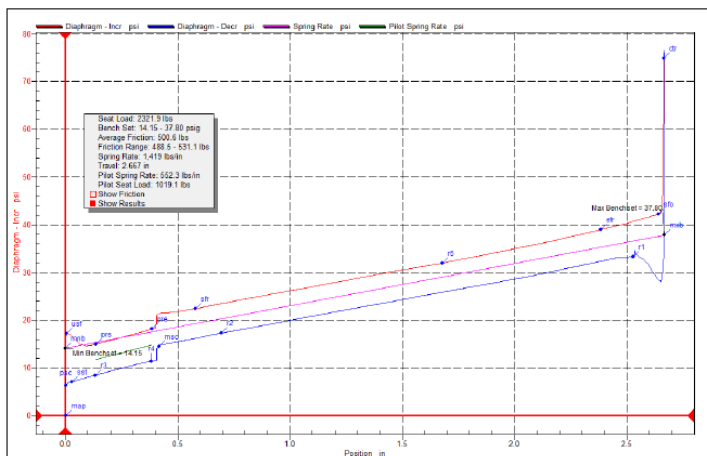

The **Pressure Sensor Interface (P/N 160078)** is used with QUIKLOOK II or QL II+ Systems. Additional accessories include:

### P/N:

- |           |                                 |
|-----------|---------------------------------|
| 160079    | QSS Adapter Cable (1 – channel) |
| 159187    | C Clamp Adapter Cable           |
| 160080-15 | 15-in Stem Position Indicator   |
| 160080-30 | 30-in Stem Position Indicator   |